

UM WINDLASS RANGE



We offer a complete range of **premium electric and hydraulic windlasses** in both horizontal and vertical configurations for boats **up to 90 meters LOA**. Our solutions cater to a wide variety of applications, supporting all conventional chain sizes and specific chain-rope combinations.

In addition to our standard range, we provide **custom solutions for OEM applications**. As true anchoring specialists in the industry, our team is prepared to offer comprehensive design and development support, ensuring a complete anchoring solution.

All our products are **manufactured in Europe** to meet and exceed the standards of the world's most important certification agencies.

COASTAL-V

VERTICAL WINDLASSES

COASTAL-V is a stainless steel AISI 316 vertical windlass with planetary drive. Available low profile, with different drives and recommended for **boats up to 10 m**. COASTAL-V can use chains up to 8 mm and is equipped with rope tensioner. Comes with built-in chain counter sensor.


UltraMarine
WE ARE DIFFERENT



CHAIN TOP



RELAY



CHAIN



MOTOR




CHARACTERISTICS	ELECTRIC MOTOR	500W	500W	800W	800W
	MOTOR SUPPLY VOLTAGE	12V	24V	12V	24V
	MAXIMUM PULL	670 Kg	680 Kg	800 Kg	810 Kg
	LIFT WORKING LOAD	90 Kg	90 Kg	100 Kg	100 Kg
	LINE SPEED	23 mt/min	23 mt/min	25 mt/min	25 mt/min
	CURRENT ABSORPTION	60 A	32 A	90 A	45 A
	WEIGHT (WITHOUT DRUM)	9 Kg	9 Kg	9,5 Kg	9,5 Kg

CHAIN	Gipsy	6mm			7mm				8mm			
	Chain supported	6mm ISO	6mm DIN766	3/16" BBB	7mm ISO	7mm DIN766	1/4" G4	1/4" BBB	8mm ISO	8mm DIN766	5/16" G4	5/16" BBB
	Rope supported	12mm 3-strand			12mm 3-strand / 8-strand				12mm 3-strand			

500	A	B	C	D	E	F	G
	90	76	18/40	265	90	175	122

800	A	B	C	D	E	F	G
	90	76	18/40	265	90	175	122

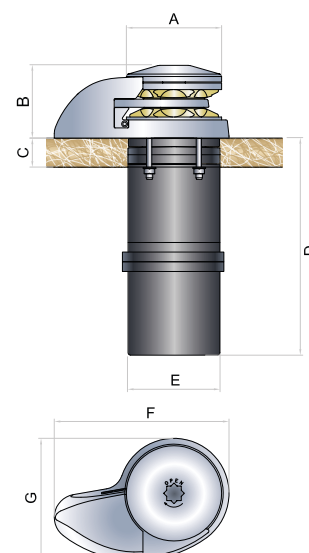

COASTAL

VERTICAL WINDLASSES

UltraMarine
WE ARE DIFFERENT


Stainless steel AISI 316 vertical windlass. Available in high or low profile, with different drives and recommended for **boats up to 13 m**. COASTAL can use chains up to 8 mm and is equipped with rope tensioner. Comes with built-in chain counter sensor.



CHAIN TOP



RELAY



CHAIN



MOTOR




CHARACTERISTICS	ELECTRIC MOTOR	500W	500W	700W	700W	1000W	1000W
	MOTOR SUPPLY VOLTAGE	12V	24V	12V	24V	12V	24V
	MAXIMUM PULL	650 Kg	660 Kg	750 Kg	760 Kg	930 Kg	940 Kg
	LIFT WORKING LOAD	90 Kg	90 Kg	100 Kg	100 Kg	130 Kg	130 Kg
	LINE SPEED	23 mt/min	23 mt/min	25 mt/min	25 mt/min	26 mt/min	26 mt/min
	CURRENT ABSORPTION	60 A	32 A	90 A	40 A	115 A	60 A
	WEIGHT (WITHOUT DRUM)	9 Kg	9 Kg	9,5 Kg	9,5 Kg	13 Kg	13 Kg
	WEIGHT (WITH DRUM)	10 Kg	10 Kg	10,5 Kg	10,5 Kg	14,5 Kg	14,5 Kg

CHAIN	Gipsy	6mm			7mm				8mm			
	Chain supported	6mm ISO	6mm DIN766	3/16" BBB	7mm ISO	7mm DIN766	1/4" G4	1/4" BBB	8mm ISO	8mm DIN766	5/16" G4	5/16" BBB
	Rope supported	12mm 3-strand			12mm 3-strand / 8-strand				12mm 3-strand			

500	A	B	C	D	E	F	G	H	I	L	M
	90	56	129	18/35	115	231	76	43	82	182	122

700	A	B	C	D	E	F	G	H	I	L	M
	90	56	129	18/35	115	231	76	43	82	182	122

1000	A	B	C	D	E	F	G	H	I	L	M
	90	56	129	18/35	150	250	76	62	114	182	122

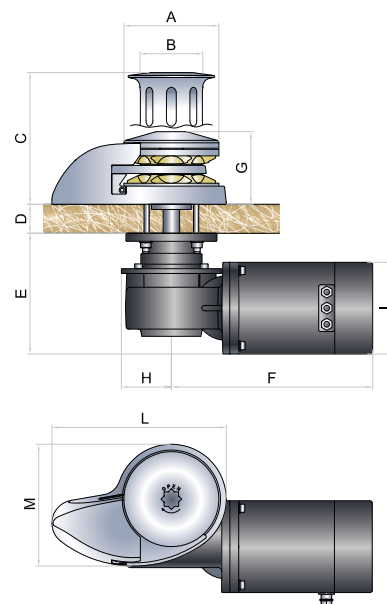


All sizes are in mm

COASTAL PLUS

VERTICAL WINDLASSES

UltraMarine
WE ARE DIFFERENT

COASTAL PLUS is a stainless steel AISI 316 vertical windlass. Available in high or low profile, with different drives and recommended for **boats up to 16 m**. COASTAL PLUS can use the 6 mm, 8 mm or 10 mm chains and is equipped with rope tensioner. Comes with built-in chain counter sensor.

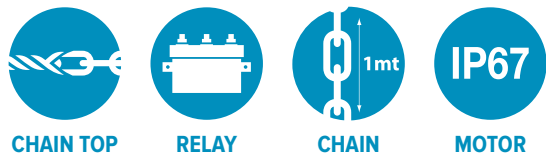


CHARACTERISTICS	ELECTRIC MOTOR	700W	700W	1000W	1000W	1500W	1500W
	MOTOR SUPPLY VOLTAGE	12V	24V	12V	24V	12V	24V
	MAXIMUM PULL	750 Kg	790 Kg	1020 Kg	1060 Kg	1250 Kg	1290 Kg
	LIFT WORKING LOAD	100 kg	110 kg	130 kg	140 Kg	150 Kg	160 Kg
	LINE SPEED	25 mt/min	25 mt/min	25 mt/min	25 mt/min	26 mt/min	26 mt/min
	CURRENT ABSORPTION	90 A	40 A	115 A	60 A	130 A	70 A
	WEIGHT (WITHOUT DRUM)	13,7 Kg	13,7 Kg	16,7 Kg	16,7 Kg	16,9 Kg	16,9 Kg
	WEIGHT (WITH DRUM)	N/A	N/A	18,1 Kg	18,1 Kg	18,3 Kg	18,3 Kg

CHAIN	Gipsy	6mm		8mm				10mm		10 DIN 766	
	Chain supported	6mm ISO	6mm DIN766	8mm ISO	8mm DIN766	5/16" G4	5/16" BBB	10mm ISO	3/8" G4	10mm DIN766	3/8" BBB
	Rope supported	N/A		14mm - 3-strand				N/A		N/A	

700	A	B	C	D	E	F	G	H	I	L	M
	118	78	164	18/35	150	231	92	43	82	221	156

1000	A	B	C	D	E	F	G	H	I	L	M
	118	78	164	25/50	150	250	92	62	114	221	156

1500	A	B	C	D	E	F	G	H	I	L	M
	118	78	164	25/50	150	250	92	62	114	221	156

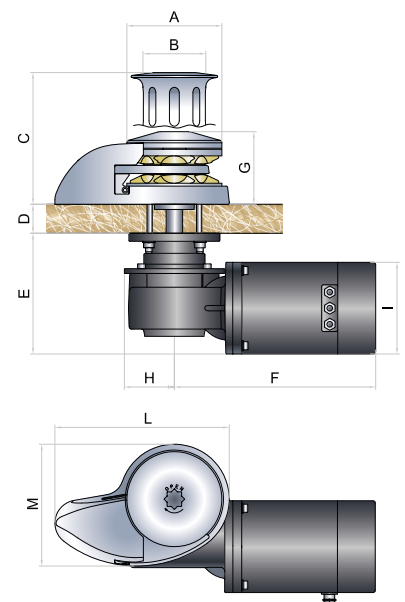

All sizes are in mm

OFFSHORE

VERTICAL WINDLASSES

Ultra Marine
WE ARE DIFFERENT

OFFSHORE is a stainless steel AISI vertical windlass. Available in high or low profile version, with different motorizations, it is suggested for **boats up to 22 meters**. OFFSHORE can bring 8mm, 10mm and 12mm chains and comes with built-in chain counter sensor. Possibility of 12V, 24V, 230V, 400V or hydraulic motorizations. Rope-chain system for 12mm chain compatible with 3-strand 18mm or 19mm rope.




CHAIN TOP



HYDRAULIC



RELAY



CHAIN



48V
MOTOR
OPTION



CHARACTERISTICS	ELECTRIC MOTOR	1500W	1500W	1700W	1700W	2000W	2200W	2000W	HY1	2300W	HY2
	MOTOR SUPPLY VOLTAGE	12V	24V	12V	24V	24V	230/400V	230/400V	N/A	24V	N/A
	MAXIMUM PULL	1250Kg	1290Kg	1650Kg	1700Kg	1750Kg	2550Kg	1700Kg	380Kg	2200Kg	1500Kg
	LIFT WORKING LOAD	170Kg	180Kg	240Kg	250Kg	270Kg	535Kg	300Kg	380Kg	500Kg	1500Kg
	LINE SPEED	12mt/min	12mt/min	12mt/min	12mt/min	12mt/min	17mt/min	20mt/min	12mt/min	12mt/min	12mt/min
	CURRENT ABSORPTION	130A	70A	138A	75A	100A	N/A	N/A	N/A	120A	N/A
	WEIGHT (WITHOUT DRUM)	25 to 35 Kg									
	WEIGHT (WITH DRUM)	30 to 40 Kg									

CHAIN	Gipsy	8mm				10mm		10 DIN 766		12mm	13mm
	Chain supported	8mm ISO	8mm DIN766	5/16" G4	5/16" BBB	10mm ISO	3/8" G4	10mm DIN 766	3/8" BBB	12mm ISO	13mm DIN766
	Rope supported	N/A				N/A				18mm - 19mm - 20mm 3 strand	N/A

1500	A	B	C	D	E	F	G	H	I	L
	150	102	212	37-62	141	252	107	78	268	188


1700 2000	A	B	C	D	E	F	G	H	I	L
	150	102	212	37-62	174	330	107	78	268	188

2300	A	B	C	D	E	F	G	H	I	L
	150	102	212	37-64	190	439	107	100	268	188

2200AC	A	B	C	D	E	F	G	H	I	L
	150	102	212	37-62	174	350	107	78	268	188

HY1	A	B	C	D	E	F	G	H	I	L
	150	102	212	37-62	165	227	107	78	268	188

HY2	A	B	C	D	E	F	G	H	I	L
	150	102	212	37-62	174	232	107	78	268	188

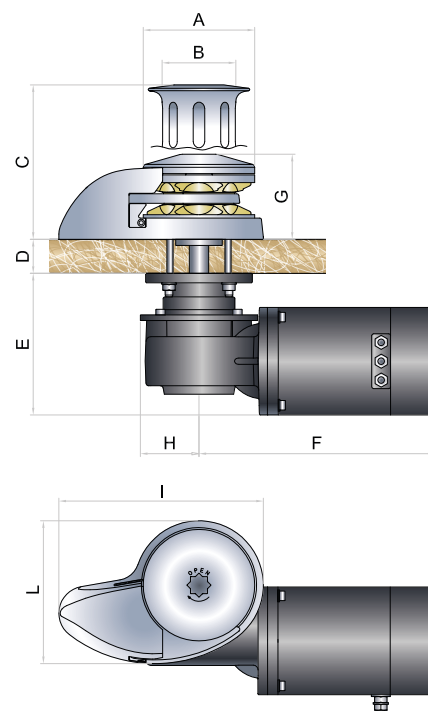


All sizes are in mm

OFFSHORE PLUS

VERTICAL WINDLASSES

Ultra Marine
WE ARE DIFFERENT


OFFSHORE PLUS is a stainless steel AISI 316 vertical windlass. Available in high or low profile, with different drives and recommended for **boats up to 26 m**. OFFSHORE PLUS can use chains up to 14 mm and comes with built-in chain counter sensor. Possibility of 24V, 230V, 400V or hydraulic drive.



CHARACTERISTICS	ELECTRIC MOTOR	2300W	2700W	3000W	2200W	3600W	HY
	MOTOR SUPPLY VOLTAGE	24V	24V	24V	230V/400V	230V/400V	N/A
	MAXIMUM PULL	2200 Kg	2300 Kg	2500 Kg	2550 Kg	2600 Kg	1500 Kg
	LIFT WORKING LOAD	500 Kg	600 Kg	750 Kg	730 Kg	824 Kg	1500 Kg
	LINE SPEED	12 mt/min	12 mt/min	13 mt/min	12 mt/min	12 mt/min	12 mt/min
	CURRENT ABSORPTION	120 A	150 A	180 A	N/A	N/A	N/A
	WEIGHT (WITHOUT DRUM)	50 to 80 Kg					
	WEIGHT (WITH DRUM)	60 to 90 Kg					

CHAIN	Gipsy	10mm		10 DIN 766		12mm			14mm	1/2" HT	14 C.T.	12,5 C.T.
	Chain supported	10mm ISO4565	3/8" G4	10mm DIN766	3/8" BBB	12mm ISO4565	13mm DIN 766	7/16" G4	14mm ISO4565	1/2" HT	14 Stud link	12,5 Stud link

2300	A	B	C	D	E	F	G	H
	225	125	281	60-110	190	439	154	100
2700	A	B	C	D	E	F	G	H
	225	125	281	60-110	190	439	154	100
3000	A	B	C	D	E	F	G	H
	225	125	281	60-110	260	454	154	130
2200AC	A	B	C	D	E	F	G	H
	225	125	281	60-110	190	378	154	100
3600AC	A	B	C	D	E	F	G	H
	225	125	281	60-110	190	433	154	100
HY	A	B	C	D	E	F	G	H
	225	125	281	60-110	190	232	154	100

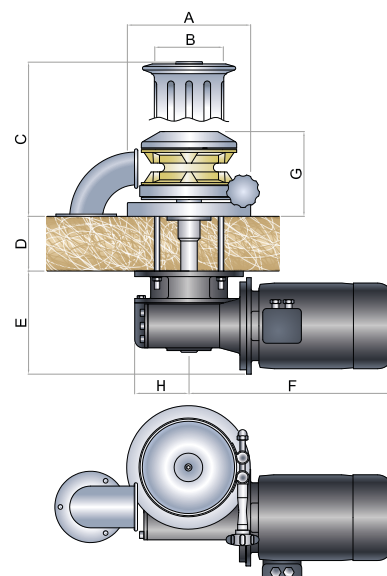

All sizes are in mm

SHORE PRO

HORIZONTAL WINDLASSES

Ultra Marine
WE ARE DIFFERENT


Stainless steel AISI 316 horizontal windlass. Available with different drives and recommended for **boats up to 12 m**. SHORE PRO can use chains up to 8 mm and is equipped with rope tensioner. Comes with built-in chain counter sensor.



CHAIN TOP



RELAY



CHAIN



MOTOR



AUTOMATIC
FREE FALL OPTION



OPTIONAL
Mounting bracket

CHARACTERISTICS	ELECTRIC MOTOR	500W	500W	800W	800W
	MOTOR SUPPLY VOLTAGE	12V	24V	12V	24V
	MAXIMUM PULL	670 Kg	680 Kg	800 Kg	810 Kg
	LIFT WORKING LOAD	90 kg	90 Kg	100 Kg	100 Kg
	LINE SPEED	25 mt/min	25 mt/min	28 mt/min	28 mt/min
	CURRENT ABSORPTION	60 A	32 A	90 A	45 A
	WEIGHT (WITHOUT DRUM)	11,5 Kg	11,5 Kg	11,5 Kg	11,5 Kg
	WEIGHT (WITH DRUM)	12 Kg	12 Kg	12 Kg	12 Kg

CHAIN	Gipsy	6mm			7mm				8mm			
	Chain supported	6mm ISO	6mm DIN766	3/16" BBB	7mm ISO	7mm DIN766	1/4" G4	1/4" BBB	8mm ISO	8mm DIN766	5/16" G4	5/16" BBB
	Rope supported	N/A			12mm 3-strand				12mm 3-strand			

500	A	B	C	D	E	F	G	H
	126	65	225	84.5	122	176	200	15/45

800	A	B	C	D	E	F	G	H
	126	65	225	84.5	122	176	200	15/45

